

AERATION CIRCULATION 50 HZ

Water in AIR / AIR in Water

SPLASH




SPLASH is a vertical surface aerator.

The huge amount of water pushed in contact with the air contributes to remarkable oxygen transfer efficiency, while degassing the water from nitrogen, carbon dioxide (CO₂), hydrogen sulfide (H₂S) and ammonia (NH₄).

PLUS

- › Double propeller for great flow in order to have the best oxygen transfer rate
- › Lightweight, easy to handle and move from a basin to another
- › Best performances in fresh water applications, also useful for brackish and seawater installations
- › Low energy consumption
- › Corrosion resistant

OPTIONAL CONVEYOR

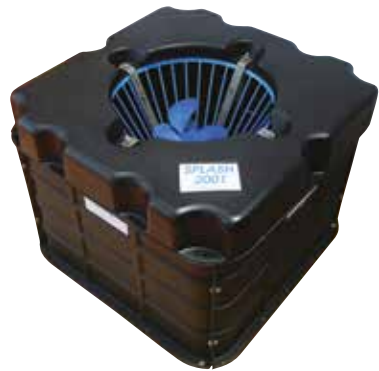


OPTIONAL CAGE



SINGLE PHASE 230 V	THREE PHASE 400 V	NOM. POW. HP	NOM. POW. KW	AMPERAGE SINGLE PHASE	AMPERAGE THREE PHASE	CAPACITY L/MIN.	R.P.M./1"	WEIGHT KG
SPLASH 2001 0.5 M SPLASH 2001 1 M	SPLASH 2001 0.5 T SPLASH 2001 1 T	0.5 1	0.37 0.75	3.2 4.5	1.3 2.0	2000 3200	1400 1400	24 25
SPLASH 2008 1.5 M SPLASH 2008 2 M	SPLASH 2008 1.5 T SPLASH 2008 2 T SPLASH 2008P 3 T	1.5 2 3	1.1 1.5 2.2	7.5 10.0	2.5 3.2 4.8	3100 3700 5400	2800 2800 2800	24 25 27

Modular black floaters in UV resistant plastic.
Floating regulation screw under sticker


Propeller in light weight reinforced plastic

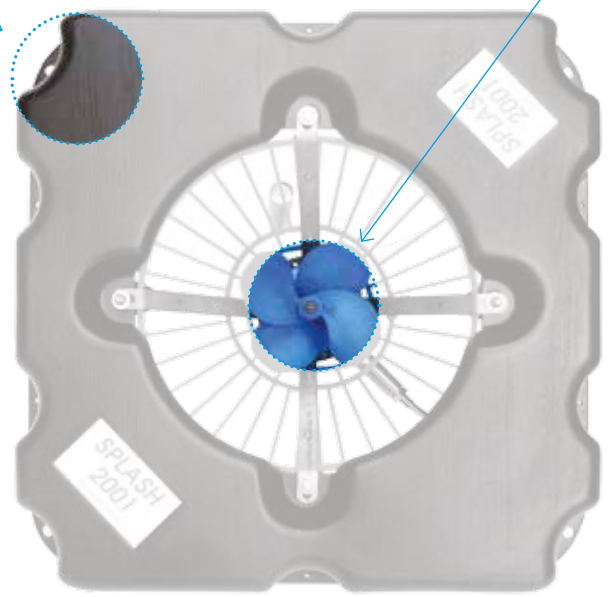

Anode in Al-Zn to avoid motor corrosion
in the most demanding environment

Teflon Propeller protection
in two pieces, easy to replace

Motor body in marine brass suitable
for seawater and resistant to galvanic current

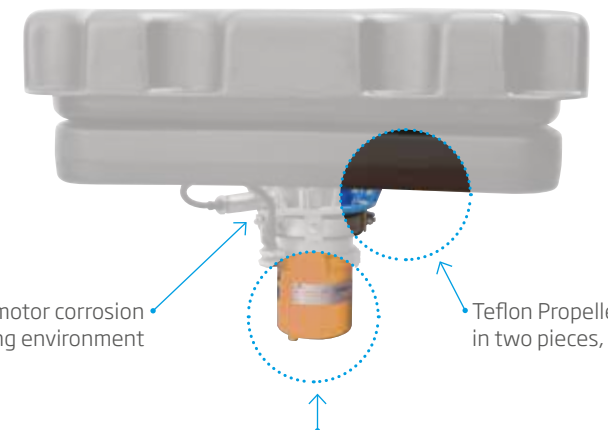



MADE IN ITALY



ACQUA&CO S.R.L

Via Augera, 5/A 42023 Cadelbosco di Sopra (RE) - Italia

Tel. +39 0522 918701 - Fax +39 0522 918790

info@acquaeco.com

