



OXYGENATING WATER TECHNOLOGY

ACQUAECOREMEDY

COMPANY

Acquaecoremedy offers systems and equipments for the water treatment, using own patented technology that provides high efficiency purification results at the lower energy consumption, which has always been the milestone of our mission. Submersible electro-injectors suitable to improve all existing treatment processes and for the future more efficient ones.

Acquaecoremedy designs and realizes treatment plants with all the classical technologies, including the traditional ones, which are mainly suitable for civil or equivalent discharges, as well as the more modern and efficient ones suitable for industrial discharges with particular purification needs, ensuring the partial or total water reuse into the food industry processes, always with attention for the specific request and process.



CIVIL AND INDUSTRIAL
WASTEWATER TREATMENT



ENVIRONMENTAL
RESTORATION



PROCESSING IN
PRODUCTION SYSTEMS



AERATORS

AERATION AND CIRCULATION IN ONE MOTOR



STORMIX MA



STORMIX PRT



VARIO MAC

CIRCULATORS

HIGHER VOLUME MOVED AT THE MINIMUM POWER SUPPLY



MIXER BR



MIXER RIO

COMBINED SYSTEMS

BEST SPECIFIC PERFORMANCES



COMBO



COMBITO



COMBO PRO



TRIPLEX



4 MIX



SPRINT

Sprint is classified as surface aerator and is suitable for use on installations in fresh and salt water, as the durability of materials allows it to be used without problems in seawater.

Sprint is highly efficient, and allows for increased levels of oxygen in the water without causing turbulence on the bottom.

It is suitable for decorative purposes, due to its high fountain, which also available with colored lights for spectacular nighttime applications.

Sprint is Available with floats.



50 HZ Other voltage available on request

Single phase 230 V	Three phase 400 V	Nom. Pow. HP	Nom. Pow. kW	Fountain height mt	Fountain width mt	Capacity l/min	r.p.m. / 1"	Weight kg	Cable mt
SPRINT 0,8 M	SPRINT 0,8 T	0.8	0.6	1.3	5.5	1110	2850	24	20
SPRINT 1 M	SPRINT 1 T	1	0.75	1.7	6.5	1250	2850	25	20
SPRINT 1,5 M	SPRINT 1,5 T	1.5	1.1	1.9	7	1500	2850	25	20
SPLASH 2008 1,5 M	SPLASH 2008 1,5 T	1.5	1.1	1.1	5	3100	2800	24	20
SPLASH 2008P 2 M	SPLASH 2008P 2 T	2	1.5	1.3	5.5	3700	2800	25	20
	SPLASH 2008P 3 T	3	2.2	1.3	6.5	5400	2800	27	20

60 HZ Other voltage available on request

Single phase 110 - 220 V	Three phase 220 V - 380 V - 440 V	Nom. Pow. HP	Nom. Pow. kW	Fountain height mt	Fountain width mt	Capacity l/min	r.p.m. / 1"	Weight kg	Cable mt
SPRINT 0,8 M	SPRINT 0,8 T	1.5	1.1	2.1	6.5	1300	3350	24	20
SPRINT 1 M	SPRINT 1 T	2	1.5	2.5	7	1370	3350	24	20
SPRINT 1,5 M	SPRINT 1,5 T	2.5	1.9	2.9	7.5	1450	3350	27	20
SPLASH 2008 1,5 M	SPLASH 2008 1,5 T	1.5	1.1	1.3	6.5	3100	3350	24	20
SPLASH 2008P 2 M	SPLASH 2008P 2 T	2	1.5	1.4	7	3800	3350	25	20
	SPLASH 2008P 3 T	2.5	1.9	1.7	7.5	5000	3350	27	20



SPRINT ALLEGRO

Sprint Allegro is classified as surface aerator suitable mainly for ornamental purposes even if the fountains can be really strong and high, up to 7 mt diameter and 3 mt high.

The dimension of the fountain can be adjusted as desired, thanks to the a really efficient brushless motor and drive (IP20 or IP66 available) that change the propeller speed and fountain dimension.

Suitable for really effective loop games or to have different fountain dimensions according with the needs.

- All the LED light colors available also in combination
- Dedicated control panel with timer and transformer

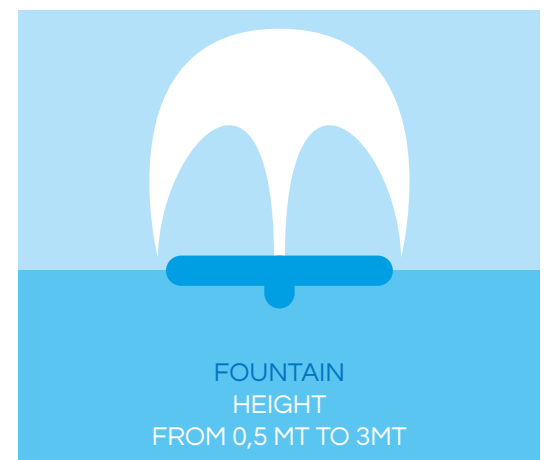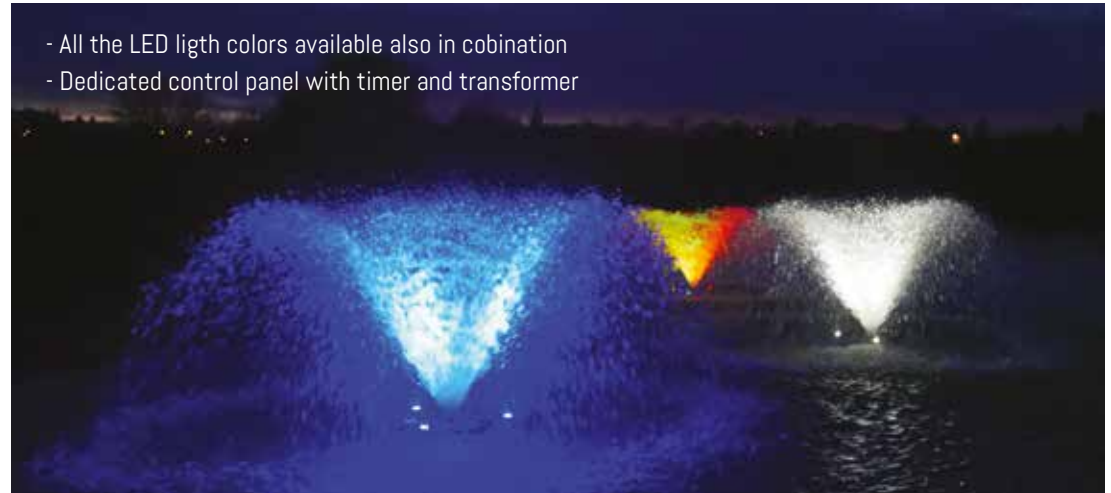

ACQUAECOREMEDY IS
THE ENVIRONMENTAL DIVISION OF



VIA AUGERA 5/A
42023 CADELBOSCO SOPRA
REGGIO EMILIA - ITALY

TEL. +39 0522 918769
FAX +39 0522 918790
INFO@ACQUAECOREMEDY.COM

WWW.ACQUAECOREMEDY.COM

