

AERATION CIRCULATION 60 HZ

Water in AIR / AIR in Water

BRIO-OX 44



BRIO-OX 44 is classified as surface aerator. The best features of this equipment include circulation, degassing, oxygenation and at the same time low power consumption. These machines are compact and powerful. They feature a motor which can be tilted upward to produce a spray effect and provide for effective work in both oxygenating and degassing mode. BRIO-OX 44 can achieve good circulation within the basin thanks to a rear water booster which is designed to allow for destratification and to avoid working on the surface layer only, as is typically the case with traditional systems.

PLUS

- › Lightweight, easy to handle and to move from tank to tank or from pond to pond
- › Sturdy and durable
- › Suitable for use in freshwater as well as in salt water
- › Conveyor available to direct the flow in order to obtain a longer direct effect
- › Floating and dock mount support versions available



SINGLE PHASE 230 V	THREE PHASE 400 V	NOM. POW. HP	NOM. POW. KW	AMPERAGE SINGLE PHASE	AMPERAGE THREE PHASE	CAPACITY L/MIN.	R.P.M./1"	WEIGHT KG
BRIO-OX 44 0.5 M	BRIO-OX 44 0.5 T	0.5	0.37	2.7	1.6	1050	3350	15.5
BRIO-OX 44 1 M	BRIO-OX 44 1 T	1	0.75	5.3	2.1	2100	3350	16.5
BRIO-OX 44 1.5 M	BRIO-OX 44 1.5 T	1.5	1.1	7.7	3.0	3100	3350	16.5



SUPPORTS



FLOATING INSTALLATION

Light weight and easy to install, for standard aquaculture applications.



DOCK MOUNT INSTALLATION

Usefull for lake de-icing, weeds/algae removal and destratification.


Customized solutions on request

BRIO-OX 47

BRIO-OX 47 is a surface aerator designed for great circulation, degassing and aeration effect. The powerful motors with which the aerator is supplied are the big brothers of the BRIO-OX range. This innovative system is the ideal solution for the oxygenation and degassing of huge volumes of water at the best efficiency rates and lowest energy consumption. Quick destratification of water basins, tanks and ponds is implemented thanks to the massive action of this cost-effective machine, which helps prompt recovery of the environmental balance.

PLUS

- › Lightweight, easy to handle and to move from tank to tank or from pond to pond
- › Sturdy and durable
- › Suitable for use in freshwater as well as in salt water
- › Conveyor available to direct the flow in order to obtain a longer direct effect
- › Floating and dock mount support versions available

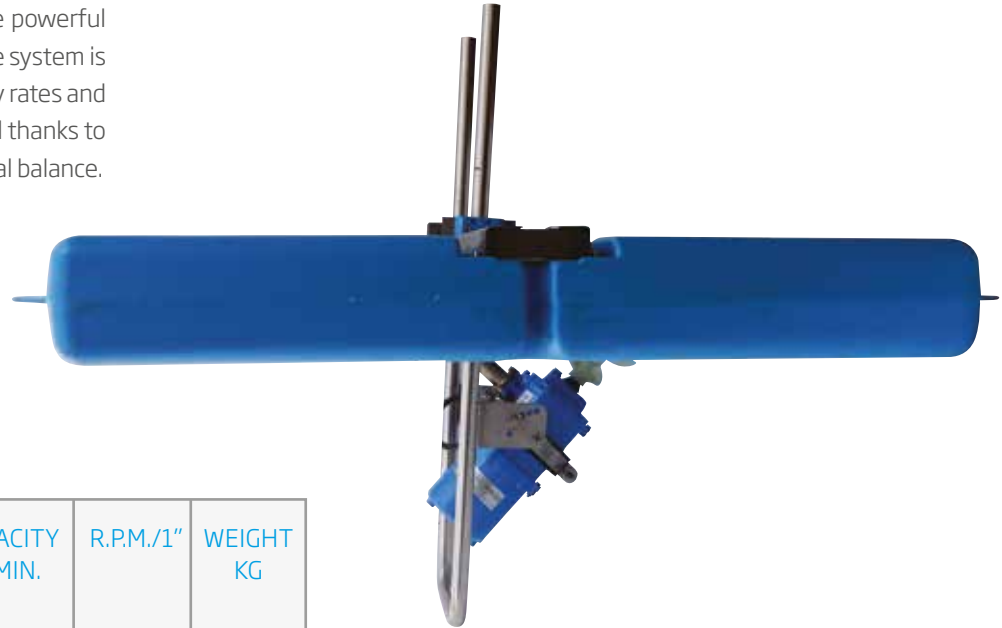

SINGLE PHASE 230 V	THREE PHASE 400 V	NOM. POW. HP	NOM. POW. KW	AMPERAGE SINGLE PHASE	AMPERAGE THREE PHASE	CAPACITY L/MIN.	R.P.M./1"	WEIGHT KG
BRIO-OX 47 1.5 M BRIO-OX 47 P 2 M	BRIO-OX 47 1.5 T BRIO-OX 47 2 T BRIO-OX 47 P 3 T	1.5 2 3	1.1 1.5 2.2	7.5 10.2	2.5 3.2 4.8	3100 3700 5400	2800 2800 2800	16.5 20/17.5 20



SUPPORTS



FLOATING INSTALLATION

Light weight and easy to install, for standard aquaculture applications.



DOCK MOUNTING INSTALLATION

Usefull for lake de-icing, weeds/algae removal and destratification.



MADE IN ITALY



ACQUA&CO S.R.L

Via Augera, 5/A 42023 Cadelbosco di Sopra (RE) - Italia
Tel. +39 0522 918701 - Fax +39 0522 918790
info@acquaeco.com

